

COB PRO SERIES



COB-24V-2700K- 800LM-16FT



White High-Efficacy COB

APPLICATION

Ideal for indirect lighting applied at contour, corridor, stair, cove, handrail, skirting, barrier, etc.



FEATURES

1. 24V system
2. Dimmable with dimmable power supply (MLV/ELV/TRIAC/0-10V Driver)
3. Seamless COB eliminates LED dotting, ultra-thin appearance, and super flexible bending.
4. High lumen output up to 800LM/FT-160lm/watts
5. Dedicated color temperatures (2700K, 3000K, 3500K, 4000K, 5000K or 6500K)
6. Use thick copper that is superior to products on the market, to ensure consistency in voltage and brightness for the entire reel.
7. Homogeneous and soft linear lighting performance for 5M[16.4ft.]
7. Homogeneous and soft linear lighting performance for 5M[16.4ft.] length
8. Easy installation with 3M™ adhesive pre-installed
9. cULus listed for indoor dry location (IP20 rated)
10. Rolls include a 12" power cord

Model Number COB-24V-2700K-800lm-16FT

CCT: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K

Wattage: 6.4W/FT

Lumen (/ft): 800

Length (ft): 16.4

Beam Angle: 120

Dimmable: Yes


Operating Temperature:

Ta: -20~45°C [-4~113°F],


Tstg: -20~60°C [-4~140°F]



PICTURE & DIAGRAM

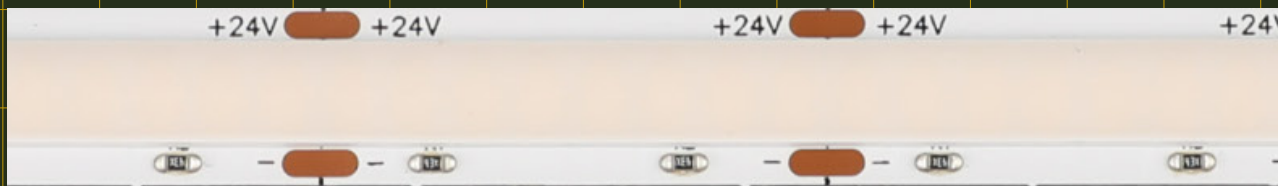

Unit: mm[in.]

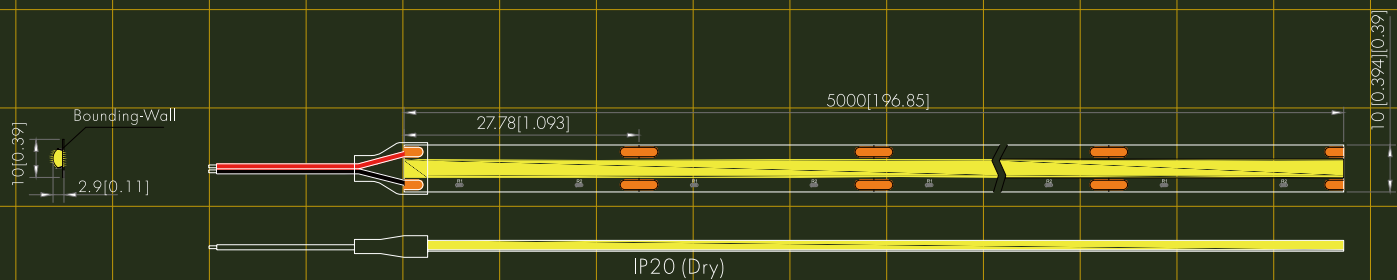

ACCESSORIES & CONNECTORS




10 MM I Connector



10 MM L Connector



10 MM Power Feed



10 MM Jumper Power Feed